

GenieClip® Mount

SOUND AND VIBRATION ISOLATION CLIP FOR
HEAVY MOUNTING



PATENTS: US 7,895,803 US 9,121,469 CA 2,552,516 AU 2,007,276,677 CN 101,631,919 SG 149,449 EP 2,047,042

PRODUCT SPECIFICATIONS

PRODUCT NAME: **GenieClip Mount**

DESCRIPTION: A unibody molded rubber and steel bracket used when objects, such as TVs, kitchen cabinets, head boards, or garage door openers, are installed on walls or ceilings of multifamily, schools, hospitals, and other commercial buildings.

APPLICATION: Used to acoustically isolate wall or ceiling mounted objects.

FEATURES AND BENEFITS:

- Significantly improves low and high frequency sound control performance
- Substantially reduces impact noise by objects mounted on walls and ceilings
- Easily fastens to standard 6" (nom. 150 mm) metal stud track
- Qualifies for LEED® points

DIMENSION: 1-5/8" width, 6-1/4" height, 1-1/2" depth (nom. 41.275 mm width, 158.75 mm height, 38.1 mm depth)


WEIGHT: 0.41 lb (186 grams)

QUANTITY/BOX: 50

QUANTITY/PALLET: 2000

GenieClip® Mount

SOUND AND VIBRATION ISOLATION CLIP FOR
HEAVY MOUNTING



PATENTS: US 7,895,803 US 9,121,469 CA 2,552,516 AU 2,007,276,677 CN 101,631,919 SG 149,449 EP 2,047,042

TECHNICAL DATA - ELASTOMER PROPERTIES

TENSILE STRENGTH (ASTM D412, ISO 37): 520 psi minimum (3.6 MPa minimum)

ELONGATION AT BREAK (ASTM D412, ISO 37): 580% minimum

TYPE A HARDNESS (ASTM D2240): 40 Durometer

DYNAMIC STIFFNESS (ASTM D5992, ISO 4664-1): 64.5 lbf/in (11.3 N/mm)

DYNAMIC-STATIC STIFFNESS RATIO (ASTM D5992, ISO 4664-1): 1.19


TECHNICAL DATA

MAXIMUM DESIGN LOAD: 200 lb (91 kg) per each clip (shear)
100 lb (45 kg) per clip (Tension/Pullout)

LABORATORY SOUND TRANSMISSION CLASS (ASTM E90): Shall not effect performance of previously isolated wall by more than 1dB in any 1/3 octave or by more than 1 STC point (Test report E2160.01-113-11)

STRUCTURE-BORNE VIBRATION REDUCTION: Shall provide test data from an accredited independent laboratory documenting average reduction of the re-radiated structure-borne noise of 22dB between 125 Hz and 4,000 Hz (Test report E2160.01-113-11)

TEMPERATURE STABILITY: -40°F to +240°F (-40°C to +115°C)

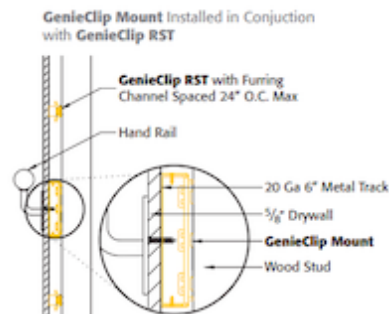

AROUND THE WORLD.

PLITEQ NORTH AMERICA

131 Royal Group Crescent
Vaughan, ON
L4H 1X9 Canada

4211, Yonge Street,
Suite 404, Toronto, ON M2P
2A9 Canada

2015 Main St,
Vancouver, BC
V5T 3C2 Canada

251 Little Falls Drive
Wilmington, DE
19808
United States of America
11701 N. 132nd Drive
Surprise, AZ
85379
United States of America

Calz. Gral. Mariano Escobedo
476-piso 12 Chapultepec
Morales, Anzures,
Miguel Hidalgo, 11590
Ciudad de México, CDMX
Mexico

T.+1 416 449 0049
T.+1 480 805 5560
T.+52 1 938 164 1551
info@pliteqacoustics.com
www.pliteqacoustics.com

PLITEQ UNITED KINGDOM

Office 205, Orega High
Holborn, 16 High Holborn,
London, WC1V 6BX
United Kingdom

T.+44 203 9846444
info@pliteqacoustics.com
www.pliteqacoustics.com/uk

PLITEQ MIDDLE EAST

European Business Centre
Dubai Investment Park
PO Box 473 512
United Arab Emirates

T. +971 4 567 4944
info@pliteqacoustics.com
www.pliteqacoustics.com/ae

PLITEQ ASIA PACIFIC

78 Shenton Way Tower 2,
6th Floor, Office Suite 25
079120, Singapore

T.+65 6813 2017
info@pliteqacoustics.com
www.pliteqacoustics.com/sg

PLITEQ AUSTRALIA

72 York Street, South
Melbourne, VIC, 3205
Australia

T.+61 3 9018 7696
info@pliteqacoustics.com
www.pliteqacoustics.com/au

